


Specifications	S-450	S-600
Sawblade speed	3600 rpm (60), 3200 rpm (50)	2000 rpm
Sawblade size	18" x 3.4 mm x 1" x 120 T	24" x 4.0 mm x 1" x 80 T
Cutting capacity (Thickness x Width)	50 x 230 mm, 100 x 200 mm	50 x 400 mm, 100 x 350 mm 150 x 300 mm, 175 x 175 mm
Motor	10 HP	10 HP (15 HP)
Feeding speed	30~90 m/min	15~60 m/min
Table height from floor	880 mm	880 mm
Working air pressure	5~7 kg / cm ²	5~7 kg / cm ²
Net weight	420 kg	580 kg
Gross weight	550 kg	670 kg
Packing dimensions (LxWxH)	890 x 1080 x 1650 mm	930 x 1420 x 1650 mm

• Specifications, dimensions and design characteristics shown in this catalog are subject to change without prior notice.



YF Website

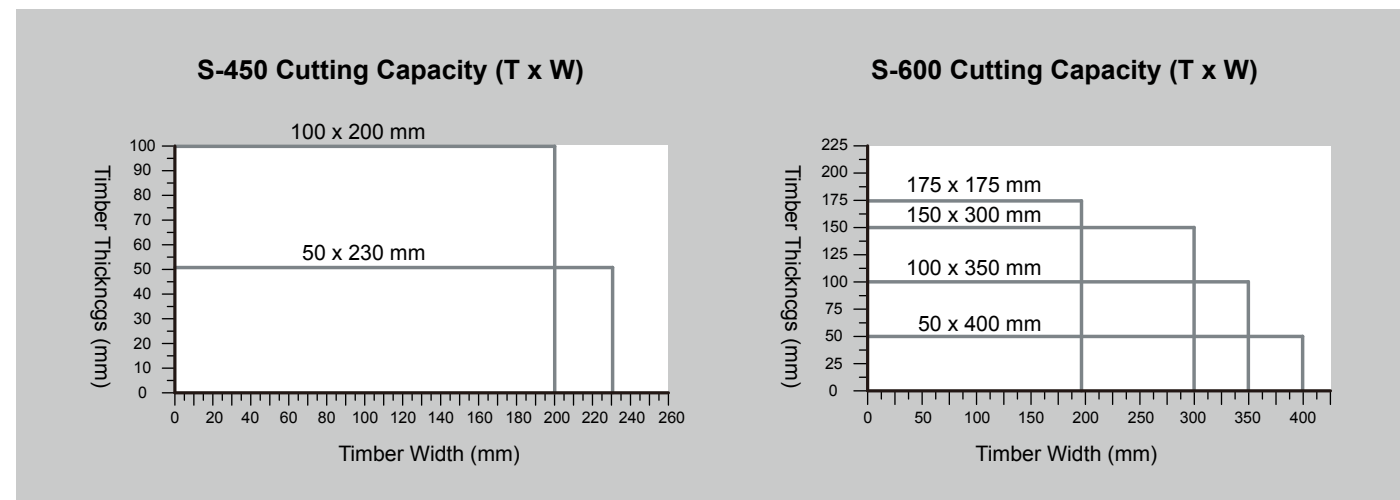

Line



What APP



Catalog Detail



YUH FARN
YUH FARN MACHINERY INDUSTRIAL CO., LTD.

No.9, Ln. 306, Sec 6, Fengyuan Blvd., Fengyuan Dist.,
Taichung City 42079, Taiwan.

TEL: +886-4-2528 8863 • 2529 9403

FAX: +886-4-2525 4171

E-mail: yuhfarn@ms32.hinet.net

http://www.yuhfarn.com.tw

http://www.woodsawing.com

AUTOMATIC PROGRAMMABLE CUT-OFF SAW

S-450 / S-600



YUH FARN
YUH FARN MACHINERY INDUSTRIAL CO., LTD.

S-450 / S-600

Automatic Programmable Cut-off Saw

Advanced Servo Controlled System

- Performing defective part cutting and fixed size cutting for meeting various cutting requirement.
- Fast processing speed 、high stability and cutting accuracy to ± 0.5 mm, solving tough cutting problems.
- It is used for finger joining material and mass material preparation.
- Automatic trimming off head workpiece. (Unavailable in marking lines cutting mode)
- Standard 100 sets of memory data and for optional to be able to connect with USB slot.
- Feeding speed up to 90 M/ min.
- Opting for lengths of infeed table to customer's requirement.



S-450



S-600

Constant length of cutting mode



Sequential cutting mode



50 sets of memory data (For sequential cutting mode only).

Marking lines cutting mode

